

10/539286

Rec'd PCT/PTO 16 JUN 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
8 July 2004 (08.07.2004)

PCT

(10) International Publication Number  
WO 2004/056546 A1

- (51) International Patent Classification<sup>7</sup>: B29C 35/02, 70/44
- (21) International Application Number: PCT/GB2003/005557
- (22) International Filing Date: 18 December 2003 (18.12.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0230043.2 23 December 2002 (23.12.2002) GB
- (71) Applicant (for all designated States except US): BAE SYSTEMS PLC [GB/GB]; 6 Carlton Gardens, London SW1Y 5AD (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): STACEY, Paul, Stephen [GB/GB]; Airbus UK Limited, New Filton House, Filton, Bristol BS99 7AR (GB). WILLIAMS, Stephen [GB/GB]; Airbus UK Limited, New Filton House, Filton, Bristol BS99 7AR (GB).
- (74) Agent: BAE SYSTEMS PLC; Group IP Department, Farnborough Aerospace Centre, Lancaster House, P.O. Box 87, Farnborough, Hampshire GU14 6YU (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: AN APPARATUS FOR CURING A COMPOSITE LAMINATE

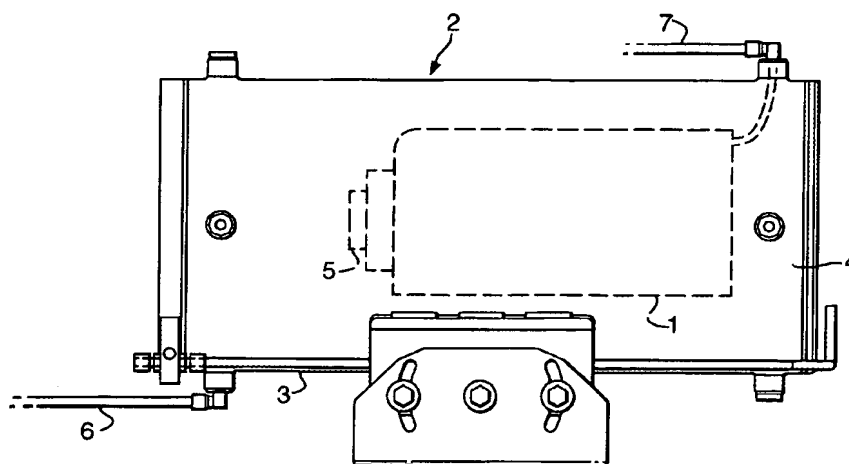

(57) Abstract: An apparatus and method for controlling the curing process during the manufacture of composite laminates and components. The apparatus including a temperature controlled vessel such as an autoclave in which the material is placed during curing and an infra-red temperature measuring device (1) such as a camera located remotely from the component to measure the temperature of at least part of the material during curing.

WO 2004/056546 A1

BEST AVAILABLE COPY

- 1 -

## AN APPARATUS FOR CURING A COMPOSITE LAMINATE

The present invention relates to the curing of composite materials for the manufacture of components and is particularly concerned with the control of the curing process.

Composite materials comprise fibres such as Carbon fibres, Glass fibres and Aramid fibres held in a variety of resin matrices. They are used to manufacture components for many applications and are especially common in the aerospace industry.

To form the composite material a chemical process by which the liquid resin cross-links to form a solid, known as curing, is undertaken. Curing generally takes place during component moulding although it can also take place at other stages of forming the component such as before or after moulding or commence during moulding and be completed after moulding. Curing of a component may require anything from a few seconds to several hours. Curing requires a reaction to take place in an applied system. In the aircraft industry components manufactured from composite materials require the reaction to occur at precisely controlled temperatures, (this may be room temperature or an elevated temperature), with or without pressure applied to consolidate the material.

Environmental conditions, including temperature distribution, have to be precisely controlled, to produce a uniform cure across the whole of the component. To allow the environment to be controlled curing takes place inside a temperature controlled vessel such as an oven or an autoclave (where pressure is also controlled). Other environmental conditions such as humidity may also be controlled. Controlling the temperature across the component is made more complex by design requirements that include relatively thick components and/or changes in the thickness of the composite material. These design requirements increase the difficulty in maintaining a constant temperature throughout the thickness of the composite material and at different points on the finished component. The differences in thickness across the

- 2 -

component means that the material does not heat up and cool down evenly, leading to hot and/or cold spots.

To control the process and know when and where more or less heat should be applied to eliminate or moderate hot and cold spots the temperature across the component is monitored. Devices such as thermocouples attached to the component edge are used to monitor temperature. However, these devices will only read the local edge temperature and give no indication of the temperature in regions of the component away from a device, such as in the centre of the component or at an edge position where a device is not attached. It is often found that there are rapid or slow heating regions (hot or cold spots) in the centre of the component due to thinning or thickening of the composite in these regions. The placing of thermocouples centrally on a curing laminate in order to monitor such heat fluctuations is not possible because the devices mark the product and this is not acceptable. In fact it is unacceptable to place any device on the surface of the component away from the edge.

The difficulties explained above can be further compounded by requirements to control the cure across the component uniformly in a harsh environment, such as high temperature and pressure as experienced in an oven or autoclave.

It is an object of the present invention to provide a method of monitoring the temperature of the component across without contact with the surface.

According to a first aspect of the invention there is provided an apparatus for curing composite material including a temperature controlled vessel in which the material is placed during curing and an infra-red temperature measuring device located remotely from the component to measure the temperature of at least part of the material during curing.

The measuring device may send temperature information to a system for controlling the temperature of the vessel that processes the information and changes the temperature as necessary.

Using a remote temperature measuring device allows the temperature of the component to be measured at points away from the edges of the

- 3 -

component without the risk of causing damage to the component. Thus allowing more data of the actual temperature being experienced by the component during cure to be collected and analysed and subsequently allowing the curing process to be more precisely controlled leading to a more accurate cure and thus a higher integrity component.

The measuring device may be located within the vessel or outside the vessel. Locating the device inside the vessel allows currently used autoclaves and ovens to be easily modified to take advantage of the benefits of the invention. New autoclaves and ovens can be designed and built in such a way to allow the device to be located outside the heating chamber but to still be able to detect the infra-red inside the chamber. The advantage of such designs is that the device does not have to be protected from the extremes of heat and pressure experienced in the chamber.

The temperature controlled vessel may be an autoclave or an oven, for example.

Preferably the infra-red temperature measuring device is a camera.

It is further preferred that the temperature across the whole of the material is monitored.

Monitoring the temperature across the whole area of the component allows for more accurate analysis and thus more accurate control of the curing process.

According to a second aspect of the invention there is provided a method for curing composite material including the steps of;

placing the material in a temperature controlled vessel and then, curing the material and during the curing monitoring the taking temperature readings and monitoring the temperature of at least part of the material using an infra-red device remote from the material.

The method may also include the step of processing the temperature readings and then adjusting the temperature of the vessel to maintain a constant curing temperature.

- 4 -

By way of example only one embodiment of the invention will now be described with reference to the following drawings in which –

Figure 1 is a view of a protective chamber for an infra-red camera.

Figure 2a is an end view of the chamber of figure 1.

5 Figure 2b is a side view of the chamber of figure 1.

Figure 3 shows the thermal mapping of a test laminate analysed using the apparatus and method of this invention.

As can be seen in figures 2a and 2b, an infra-red camera 1 was placed in a protective chamber 2 to protect the camera 1 from the extremes of heat and temperature experienced within an autoclave that can typically be as high as 10 200°C and  $8 \times 10^5$  N/m<sup>2</sup> respectively. The chamber 2 is constructed as a twin walled 3, 4 stainless steel structure having a lens of Zinc Selenide 5. Zinc Selenide is used for the lens 5 because it is transparent to infra-red, unlike ordinary glass, and thus allows infra red to pass through to the detector within 15 the camera 1. The lens 5 is made of a special crystal 12mm thick that can withstand the temperatures and pressures experienced in the autoclave (not shown).

The chamber 2 is cooled by both water and air simultaneously to maintain the environment experienced by the camera 1 at acceptable 20 temperature and pressure. To enable the chamber 2 to receive the cooling water, air, and data/camera control cables, an entry pipe 6 and an exit pipe 7 pass through the chamber 2 to the camera 1. Both pipes 6, 7 are constructed as flexible twin walled pipes creating an inner passage and a surrounding outer passage. The entry pipe 6 provides coolant in the form of air and water. The 25 inner passage of the pipe 6 transports air into the chamber 2 to power air shutters and to ventilate cool air into the chamber 2. The outer passage of the pipe 6 acts as a water jacket transporting cooling water to the twin wall of the chamber. The exit pipe 7 is configured in the same way and removes the water (passing through the outer passage) and air (passing through the inner 30 passage) when they have absorbed the heat. Cables also pass through the

- 5 -

inner passage of the pipe 7 allowing the camera to be controlled and data to be passed to a control system.

The control system uses software to process the data received from the camera 1. This can be done in real time or at a later date. In real-time  
5 processing and analysing the data allows cure temperatures to be controlled and the temperature of the autoclave to be adjusted as necessary. By selecting specific points on the component to be cured to take readings from (usually points expected to be hot or cold spots) and directing the camera 1 to these points, the component temperature can be measured with considerable  
10 accuracy, allowing curing to be controlled very precisely.

The camera 1 can also be used to analyse the heating up and down characteristics of the autoclave prior to the autoclave being used for curing of components. Specific points in the autoclave can be monitored through a  
15 heating cycle (up and down) to see how quickly the temperature in the autoclave responds to changes in the heat provided. Thus the change in characteristics due to the introduction of tooling and/or support structures for individual components by thermally surveying such tools and supports using the camera can be analysed. The results of the analysis can be used in the control  
20 system software when assessing when and how to change the heat supplied to the autoclave once again improving precision and accuracy of the curing of a component and allowing heating potential to be maximised. An example of environmental properties that can be changed is the rate of airflow through the autoclave as well as the airflow temperature.

25 The cure process of composite materials can be subject to entrapment of air causing voids not normally visible to the manufacturer until after removal from cure and only visible when subject to Non destructive testing like C-Scan. The analysis carried out in real time using the above described system can be  
30 developed to allow inspection of composite components during curing and this can be incorporated into the cure process for the real time inspection of components.

- 6 -

The camera 1 maybe fixed in position or moveably mounted to allow larger structures to be monitored by one camera 1.

Figure 3 shows a view of an initial test laminate 10 within an autoclave. The shading of the view indicates the differences in temperature across the  
5 laminate10. Cooler spots show up as lighter shades and hotter spots as darker shades as indicated by the temperature key 11. As can be seen the edge of the laminate 12 is cooler than the rest of the laminate 10.

- 7 -

Claims

1. An apparatus for curing composite material including a temperature  
5 controlled vessel in which the material is placed during curing and an  
infra-red temperature measuring device located remotely from the  
component to measure the temperature of at least part of the material  
during curing.
2. An apparatus according to claim 1 wherein the measuring device sends  
10 temperature information to a system for controlling the temperature of the  
vessel which processes the information and changes the temperature as  
necessary.
3. An apparatus as claimed in claim 1 or claim 2 wherein the measuring  
device is located within the vessel.
- 15 4. An apparatus as claimed in claim 1 or claim 2 wherein the measuring  
device is located outside the vessel
5. An apparatus as claimed in any preceding claim wherein the temperature  
controlled vessel is an autoclave.
6. An apparatus as claimed in any previous claim wherein the infra-red  
20 temperature measuring device is a camera.
7. An apparatus as claimed in any previous claim wherein the temperature  
across the whole of the material is monitored.
8. A method for curing composite material including the steps of;  
placing the material in a temperature controlled vessel and then,  
25 curing the material and during the curing monitoring the taking  
temperature readings and monitoring the temperature of at least part of  
the material using an infra-red device remote from the material.




- 8 -

9. A method as claimed in claim 8 including processing the temperature readings and then adjusting the temperature of the vessel to maintain a constant curing temperature.
10. An apparatus substantially as herein before described with reference to the accompanying drawings.
11. A method substantially as herein before described with reference to the accompanying drawings.

1/3

Fig.1.

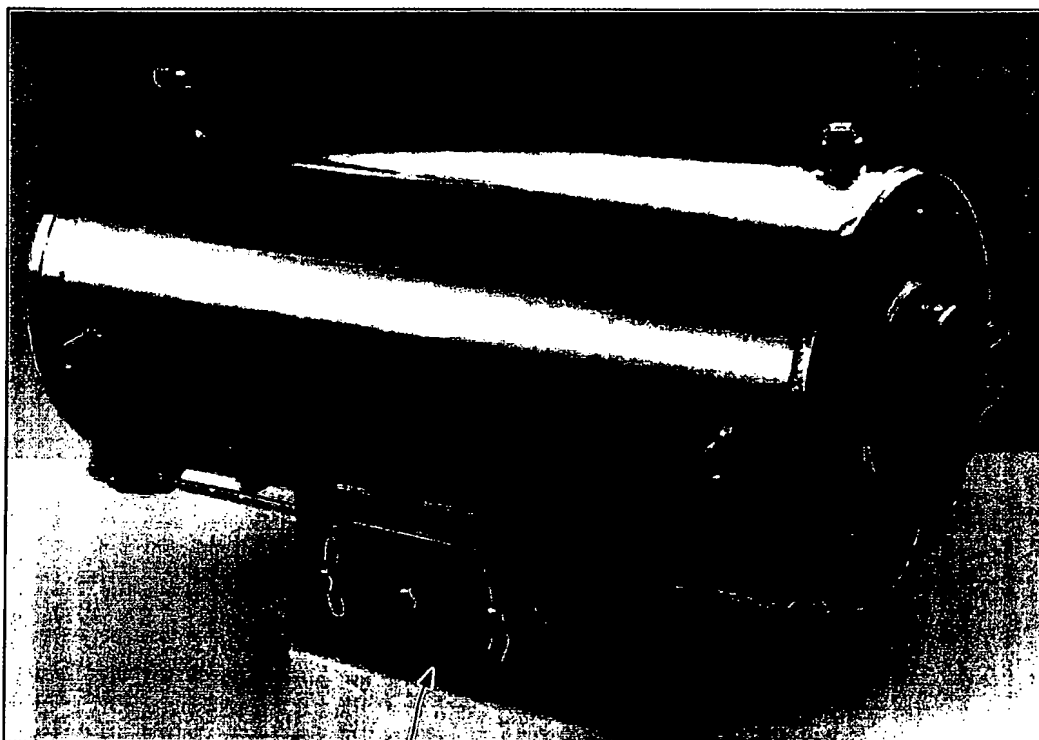

2

SUBSTITUTE SHEET (RULE 26)

Fig.2a.



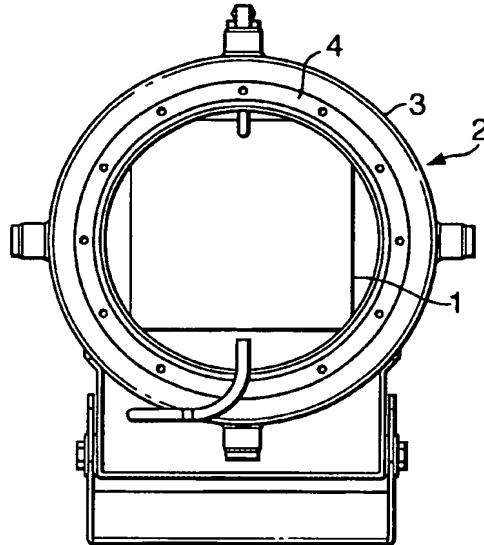


Fig.2b.

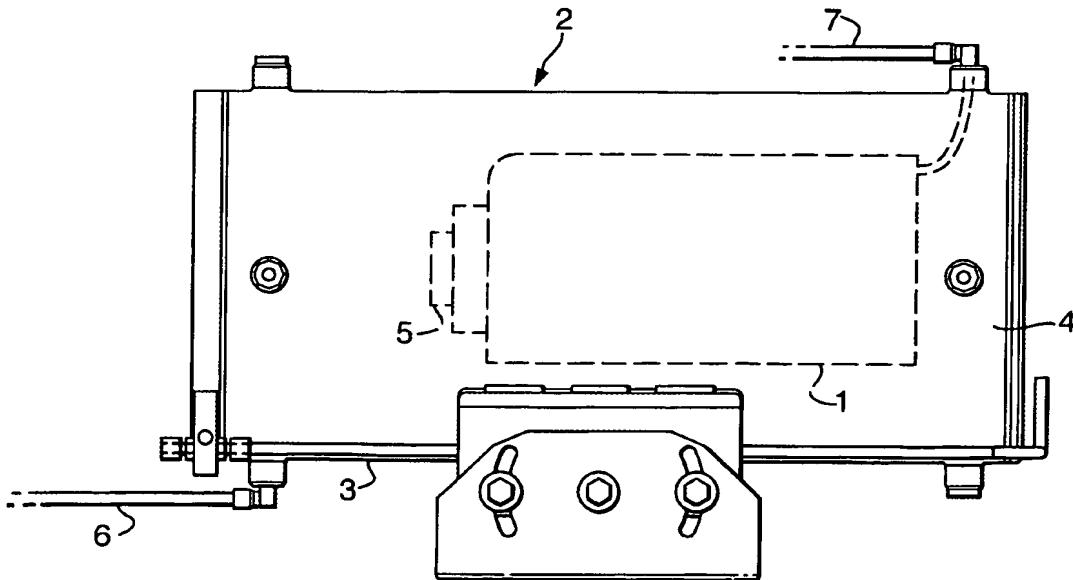

3/3

Fig.3.

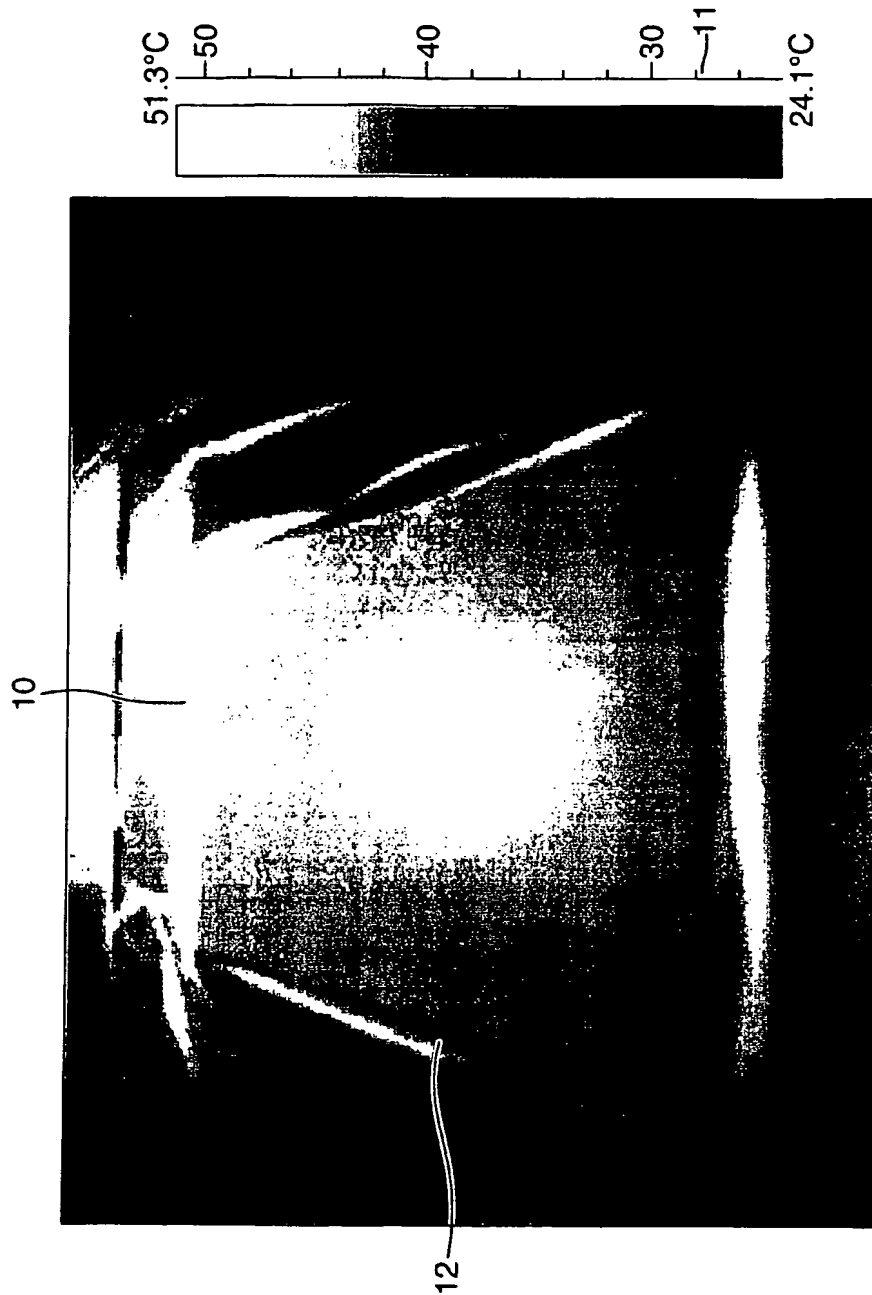

SUBSTITUTE SHEET (RULE 26)

# INTERNATIONAL SEARCH REPORT

PCT/GB 03/05557

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 B29C35/02 B29C70/44

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B29C 601J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 132 084 A (BONISSONE PIERO PATRONE ET AL) 17 October 2000 (2000-10-17)	1-4
Y	column 1 - column 4, line 8; figures	5-7
X	DE 196 15 244 A (PLEVA GMBH) 23 October 1997 (1997-10-23)	1
Y	the whole document	2-7
Y	US 4 874 948 A (CIELO PAOLO ET AL) 17 October 1989 (1989-10-17)	1-11
	column 1 - line 65; figures	
	column 5, line 50 - line 57	
	column 9, line 9 - line 31	
Y	US 4 515 545 A (THUEN JUDY ET AL) 7 May 1985 (1985-05-07)	1-11
	abstract; figures	
	----- -/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search

4 March 2004

Date of mailing of the international search report

12/03/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Kopp, C

## INTERNATIONAL SEARCH REPORT

PCT/GB 03/05557

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4 828 472 A (ITOH YASUHIRO ET AL) 9 May 1989 (1989-05-09) the whole document -----	1-11
Y	US 5 209 881 A (CHARBONNET DERRICK) 11 May 1993 (1993-05-11) column 3, line 19 - column 4, line 57; figures -----	1-11
Y	US 5 345 397 A (HANDEL PAUL I ET AL) 6 September 1994 (1994-09-06) the whole document -----	1-11
A	US 4 685 812 A (PHILIPPE JEAN ET AL) 11 August 1987 (1987-08-11) column 1, line 40 - line 45 -----	1-11

# INTERNATIONAL SEARCH REPORT

PCT/GB 03/05557

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6132084	A	17-10-2000	NONE
DE 19615244	A	23-10-1997	DE 19615244 A1 23-10-1997
US 4874948	A	17-10-1989	NONE
US 4515545	A	07-05-1985	US 4455268 A 19-06-1984 US 4559810 A 24-12-1985
US 4828472	A	09-05-1989	NONE
US 5209881	A	11-05-1993	NONE
US 5345397	A	06-09-1994	NONE
US 4685812	A	11-08-1987	FR 2574543 A1 13-06-1986 AT 393165 B 26-08-1991 AT 354785 A 15-01-1991 BE 903818 A1 01-04-1986 CA 1303384 C 16-06-1992 DE 3542887 A1 10-07-1986 ES 8703633 A1 01-05-1987 GB 2168811 A , B 25-06-1986 IT 1201394 B 27-01-1989 JP 61148360 A 07-07-1986 LU 86197 A1 14-04-1986 NL 8503334 A 01-07-1986 SE 8505785 A 11-06-1986

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**